


### Flair MEDICINE CABINET




#### FEATURES/TYPICAL SPECIFICATIONS

- Surface Mount Installation
  - Pre-drilled mounting holes
- Formed and welded steel housing (WB/ST)
  - 25 gauge steel construction with white, heat cured, acrylic paint finish
  - Polished stainless steel trim strips - both sides and bottom on body front
  - 22 gauge galvanized steel top cover
- Sliding Mirror Doors
  - 1/8" thick float glass mirror door with polished edges, 4 sides (2 typical)
  - Clear acrylic door pull (2 typical)
  - Mirror doors slide in white PVC dual slotted tracks (2 typical / one top & one bottom) snapped into housing
- Incandescent dual light sockets (2 typical) (Uses four 60 watt maximum, medium base, 120V bulbs (I60A) - bulbs not included)
- White, translucent plastic lens
  - .063" thick high impact polystyrene
  - Ribbed outside surface
- Grounded on/off switch located top right side of cabinet
- 25 gauge steel shelf with white, heat cured, acrylic paint finish (1 typical)
  - Fixed shelf (FX)
- Includes installation hardware
- Pallet Quantity = 24 units

#### Finishes:

Housing: PT01 - Basic White  
 Mirror: POL1 - Polished Edge  
 Cabinet Trim: SS8-Polished Stainless Steel

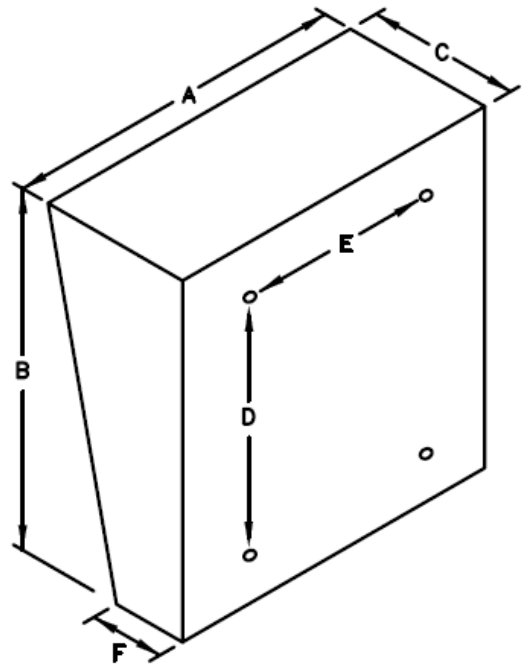

		Dimensions In Inches					
Model #	Description	A	B	C	D	E	F
323LP	MEDCAB 2DR 24X19 SS8 WB/ST	23 <sup>3</sup> / <sub>4</sub>	19 <sup>9</sup> / <sub>8</sub>	7-7/16	9-5/16	18-11/16	4-11/16

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by
			Date

\* All models and material specifications are subject to change or withdrawal without notice.