

# SelectF & P

## Fiberglass & Polyester Panel Filters

### OVERVIEW

Pamlico Air's SelectF and SelectP air filters are cost-effective and efficient disposable panel filters. These filters were created specifically for commercial and industrial applications requiring a light-medium workload. The SelectF and SelectP air filters feature durable construction Kraft board channel frames. These easy-to-install filters are environmentally friendly.

### CONSTRUCTION

Pamlico Air offers these disposable panel filters in two options: fiberglass, the SelectF, and polyester, the SelectP. Both the SelectF and SelectP have a moisture-resistant, Kraft board channel frame. Both disposable panel filter options are available in one- and two-inch depths as well as custom sizes. The Select Series filters are all made in the USA.

### APPLICATION

The SelectF and SelectP air filters should be used in applications that require light-medium duty filtration and should follow a change-out schedule of every 30 days. Applications that would benefit from the SelectF and SelectP air filters include schools, hotels, commercial office buildings, hospitals, pharmaceutical plants, laboratories, and other facilities.

### ADDITIONAL OPTIONS


- *SelectFDC & PDC – reinforced fiberglass & polyester panel filters (See DS2SEL)*
- *SelectPlus8 – MERV 8 fiberglass panel filters (See DS108P)*



### PRODUCT SPOTLIGHT

- Durable Kraft board channel frame
- Available in fiberglass (white) & polyester (blue)
- Environmentally friendly
- Available in 1" & 2"
- Max operating temp: 150°F
- Made in the USA

### TECHNICAL DATA

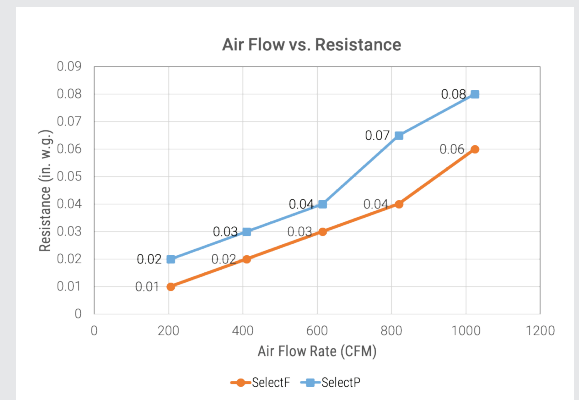

\*Based on 1" depth

# SelectF & P

## Fiberglass & Polyester Panel Filters

### PERFORMANCE DATA

Nominal Depth	Nominal Size (WxHxD)	Actual Size (in.)			Air Flow @ Capacity (CFM)	Resistance @ Capacity (in. w.g.)		Total Media Area (sq. ft.)
		Width	Height	Depth		Fiberglass	Polyester	
1"	12x12x1	11.75	11.75	0.75	300	0.05	0.16	0.92
	12x18x1	11.75	17.75		450			1.40
	12x20x1	11.75	19.75		500			1.56
	12x24x1	11.75	23.75		600			1.88
	12x25x1	11.75	24.75		625			1.96
	14x14x1	13.75	13.75		408			1.27
	14x18x1	13.75	17.75		525			1.64
	14x20x1	13.75	19.75		583			1.83
	15x20x1	14.75	19.75		625			1.96
	16x16x1	15.75	15.75		533			1.67
	16x18x1	15.75	17.75		600			1.88
	16x20x1	15.75	19.75		667			2.10
	16x24x1	15.75	23.75		800			2.53
	16x25x1	15.75	24.75		833			2.64
	18x18x1	17.75	17.75		675			2.13
	18x20x1	17.75	19.75		750			2.37
	20x20x1	19.75	19.75		833			2.64
	20x24x1	19.75	23.75		1000			3.18
20x25x1	19.75	24.75	1042	3.32				
20x30x1	19.75	29.75	1250	4.00				
2"	16x20x2	15.75	19.75	1.75	667	0.07	0.18	2.10
	16x24x2	15.75	23.75		800			2.53
	16x25x2	15.75	24.75		833			2.64
	20x20x2	19.75	19.75		833			2.64
	20x24x2	19.75	23.75		1000			3.18
	20x25x2	19.75	24.75		1042			3.32

Notes:

- 1" & 2" deep filters are rated at 300 fpm.
- More sizes are available. Please consult Pamlico Portal or contact customer service at [customerservice@pamlico-air.com](mailto:customerservice@pamlico-air.com).
- Performance data is based on ASHRAE Test Standards 52.2.



112 S. Respass St. Washington, NC 27889  
252.623.4010 | [www.pamlico-air.com](http://www.pamlico-air.com) | [info@pamlico-air.com](mailto:info@pamlico-air.com)



SELECTF & P | DS1SEL-0320