

SelectF & P

Fiberglass & Polyester Panel Filters

OVERVIEW

Pamlico Air's SelectF and SelectP air filters are cost-effective and efficient disposable panel filters. These filters were created specifically for commercial and industrial applications requiring a light-medium workload. The SelectF and SelectP air filters feature durable construction Kraft board channel frames. These easy-to-install filters are environmentally friendly.

CONSTRUCTION

Pamlico Air offers these disposable panel filters in two options: fiberglass, the SelectF, and polyester, the SelectP. Both the SelectF and SelectP have a moisture-resistant, Kraft board channel frame. Both disposable panel filter options are available in one- and two-inch depths as well as custom sizes. The Select Series filters are all made in the USA.

APPLICATION

The SelectF and SelectP air filters should be used in applications that require light-medium duty filtration and should follow a change-out schedule of every 30 days. Applications that would benefit from the SelectF and SelectP air filters include schools, hotels, commercial office buildings, hospitals, pharmaceutical plants, laboratories, and other facilities.

ADDITIONAL OPTIONS


- *SelectFDC & PDC – reinforced fiberglass & polyester panel filters (See DS2SEL)*
- *SelectPlus8 – MERV 8 fiberglass panel filters (See DS108P)*



PRODUCT SPOTLIGHT

- Durable Kraft board channel frame
- Available in fiberglass (white) & polyester (blue)
- Environmentally friendly
- Available in 1" & 2"
- Max operating temp: 150°F
- Made in the USA

TECHNICAL DATA

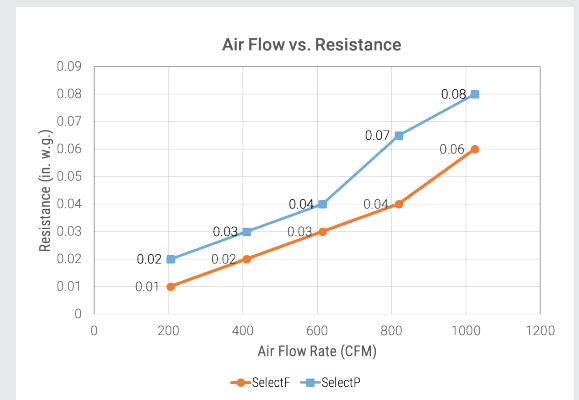

*Based on 1" depth

SelectF & P

Fiberglass & Polyester Panel Filters

PERFORMANCE DATA

| Nominal Depth | Nominal Size (WxHxD) | Actual Size (in.) | | | Air Flow @ Capacity (CFM) | Resistance @ Capacity (in. w.g.) | | Total Media Area (sq. ft.) |
|---------------|----------------------|-------------------|--------|-------|---------------------------|----------------------------------|-----------|----------------------------|
| | | Width | Height | Depth | | Fiberglass | Polyester | |
| 1" | 12x12x1 | 11.75 | 11.75 | 0.75 | 300 | 0.05 | 0.16 | 0.92 |
| | 12x18x1 | 11.75 | 17.75 | | 450 | | | 1.40 |
| | 12x20x1 | 11.75 | 19.75 | | 500 | | | 1.56 |
| | 12x24x1 | 11.75 | 23.75 | | 600 | | | 1.88 |
| | 12x25x1 | 11.75 | 24.75 | | 625 | | | 1.96 |
| | 14x14x1 | 13.75 | 13.75 | | 408 | | | 1.27 |
| | 14x18x1 | 13.75 | 17.75 | | 525 | | | 1.64 |
| | 14x20x1 | 13.75 | 19.75 | | 583 | | | 1.83 |
| | 15x20x1 | 14.75 | 19.75 | | 625 | | | 1.96 |
| | 16x16x1 | 15.75 | 15.75 | | 533 | | | 1.67 |
| | 16x18x1 | 15.75 | 17.75 | | 600 | | | 1.88 |
| | 16x20x1 | 15.75 | 19.75 | | 667 | | | 2.10 |
| | 16x24x1 | 15.75 | 23.75 | | 800 | | | 2.53 |
| | 16x25x1 | 15.75 | 24.75 | | 833 | | | 2.64 |
| | 18x18x1 | 17.75 | 17.75 | | 675 | | | 2.13 |
| | 18x20x1 | 17.75 | 19.75 | | 750 | | | 2.37 |
| | 20x20x1 | 19.75 | 19.75 | | 833 | | | 2.64 |
| | 20x24x1 | 19.75 | 23.75 | | 1000 | | | 3.18 |
| 20x25x1 | 19.75 | 24.75 | 1042 | 3.32 | | | | |
| 20x30x1 | 19.75 | 29.75 | 1250 | 4.00 | | | | |
| 2" | 16x20x2 | 15.75 | 19.75 | 1.75 | 667 | 0.07 | 0.18 | 2.10 |
| | 16x24x2 | 15.75 | 23.75 | | 800 | | | 2.53 |
| | 16x25x2 | 15.75 | 24.75 | | 833 | | | 2.64 |
| | 20x20x2 | 19.75 | 19.75 | | 833 | | | 2.64 |
| | 20x24x2 | 19.75 | 23.75 | | 1000 | | | 3.18 |
| | 20x25x2 | 19.75 | 24.75 | | 1042 | | | 3.32 |

Notes:

- 1" & 2" deep filters are rated at 300 fpm.
- More sizes are available. Please consult Pamlico Portal or contact customer service at customerservice@pamlico-air.com.
- Performance data is based on ASHRAE Test Standards 52.2.



112 S. Respass St. Washington, NC 27889
252.623.4010 | www.pamlico-air.com | info@pamlico-air.com



SELECTF & P | DS1SEL-0320