



FWD-1

1/3 Horsepower Food Waste Disposer

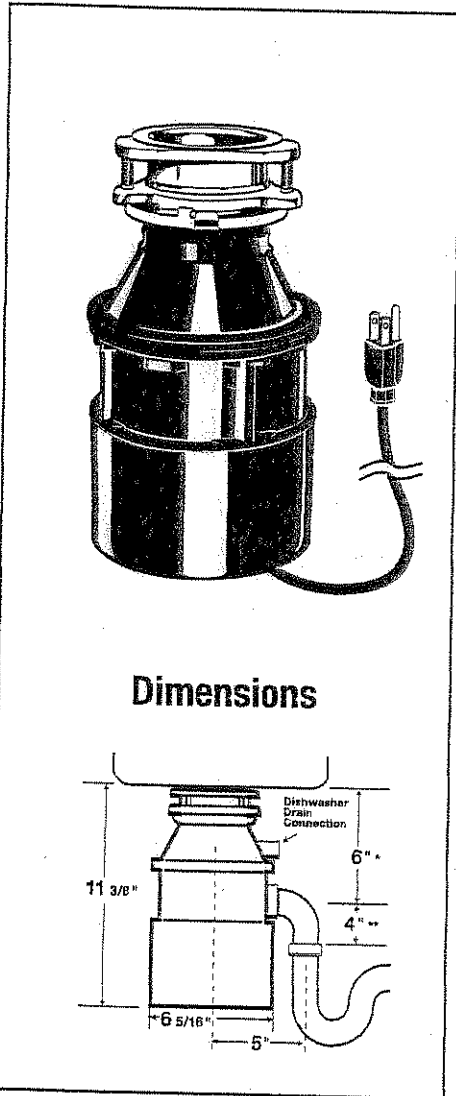

Dimensions



- * Distance from bottom of sink to center line of disposer outlet.
Add 1/2" when stainless steel sinks are used.
 - ** Length of tailpipe from center line of disposer outlet to end of tailpipe.
- NOTE: Plumb waste line to prevent standing water in disposer motor housing.

Submittal Sheet

- 1 year limited warranty*
- Plastic grind chamber
- Galvanized steel grinding elements with two stainless steel 360° swivel lugs
- Stainless steel sink flange with positive seal 1-piece plastic stopper
- Overload protector manual reset
- Permanently lubricated upper and lower bearings
- Quick Lock™ mounting for fast, easy installation
- Exclusive cushioned anti-splash baffle
- Dishwasher drain connection
- Factory installed power cord

Specifications

Type of Feed	Continuous
On/Off Control	Wall Switch
Motor	Single Phase
HP	1/3
Volts	120
HZ	60
RPM	1725
Amp. (Avg. Load)	6.7
Time Rating	Intermittent
Lubrication	Permanently Lubricated Upper & Lower Bearings
Shipping Weight (Approx.)	13 lbs. 8 oz.
Unit Finish	Waterborne Brown Enamel
Overall Height	11-3/8"
Grind Chamber Capacity	26 oz.
Motor Protection	Manual reset Overload
Average Water Usage	1/4 Gallon Per Person Per Day
Average Electrical Usage	1/2 KWH Per Month
Drain Connection	1-1/2" Cushioned Slip Joint
Dishwasher Drain Connection	Yes
Factory installed Power Cord	Yes

Sample Specification

Food Waste Disposer(s) shall be FWD-1, continuous feed, with 1/3 H.P. motor, galvanized steel grinding elements with two stainless steel 360° swivel lugs. Factory installed 3' power cord included.
Warranty - 1 year limited.

* The complete FWD warranty is included in the Care & Use Booklet, packed with each unit.

Job Specifications

